




OCMJ2X4C

64 X 32 dots

P.25

Golden Palm Industry Co.,Ltd

Address:13-15F,Block E,Tian Ning Plaza,
Jianshe 4th Road,Zhaoqing,Guangdong
Province,China Postcode:526040
Tel:86-758-2317053 Fax:86-758-2317722
E-mail:support@gptlcm.cn syl@gptlcm.cn
http://www.gptlcm.cn

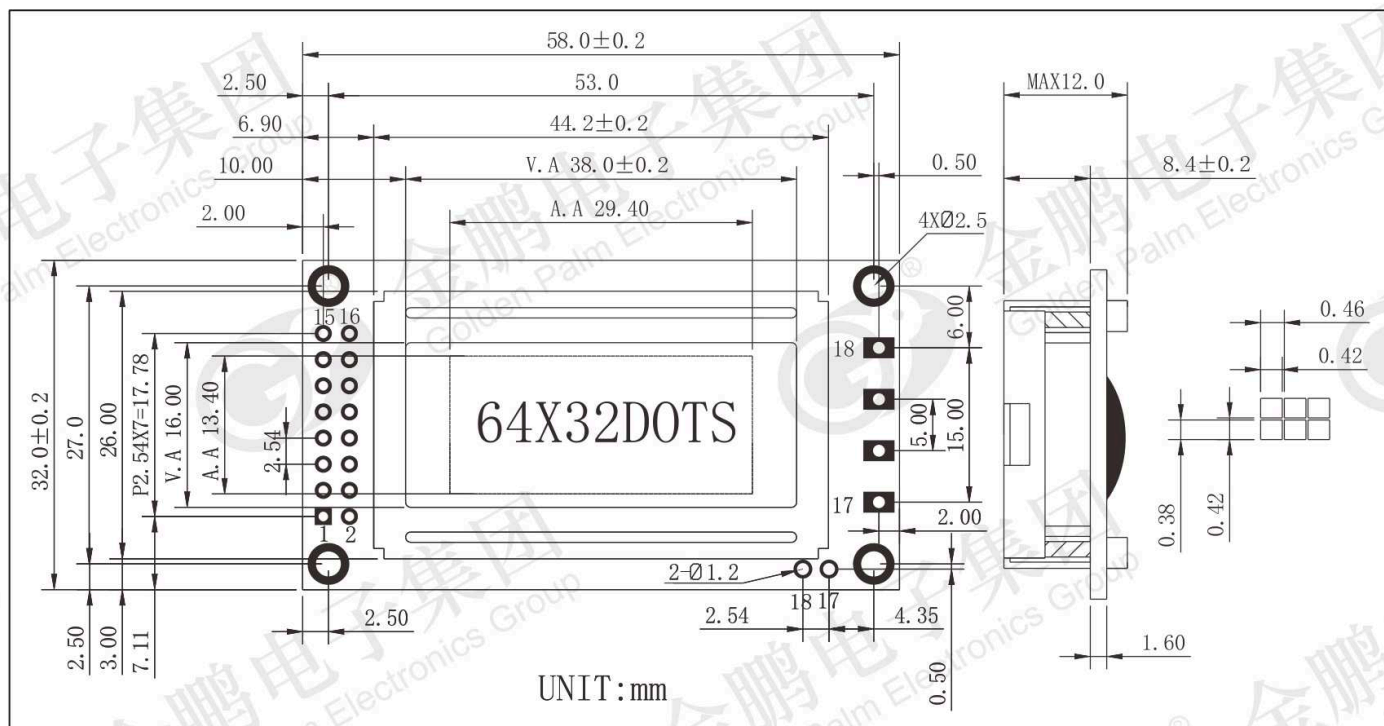

ABSOLUTE MAXIMUM RATINGS

Item	Symbol	Min.	Max.	Unit
Supply Voltage(Logic)	V _{DD} -V _{SS}	2.7	5.5	V
Supply Voltage(LCD)	V _O -V _{SS}	3.0	7.0	V
Input Voltage	V _I	-0.3	V _{DD} + 0.3	V
Operating Temp.	T _{opr}	-20	70	°C
Storage Temp.	T _{stg}	-30	80	°C

MECHANICAL DATA

Item	Nominal Dimensions	Unit
Module Size(W X H X T)	58X32X12	mm
Viewing Area(W X H)	38X16	mm
Dot Pitch(W X H)	0.46X0.42	mm
Dot Size(W X H)	0.42X0.38	mm


ELECTRICAL CHARACTERISTICS (V_{DD}=5V±0.25V)

Item	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input High Voltage	V _{IH}	--	0.7V _{DD}	--	V _{DD}	V
Input Low Voltage	V _{IL}	--	0	--	0.3V _{DD}	V
Output High Voltage	V _{OH}	I _{OH} = -0.4mA	V _{DD} -0.4	--	--	V
Output Low Voltage	V _{OL}	I _{OL} = +0.4mA	--	--	0.4	V
Supply Current	I _{DD}	V _{DD} = 5.0V	--	2.0	3.0	mA

PIN CONNECTIONS

Pin	Symbol	Level	Function
1	V _{SS}	--	GND (0V)
2	V _{DD}	--	Supply Voltage for Logic (+5V)
3	VO(NC)	--	PowerSupplyForLCDdrive
4	RS (CS)	H/L	H : Data L : Instruction Code (Chip Enable for Serial Mode)
5	RW (SID)	H/L	H : Read L : Write (Serial Data for Serial Mode)
6	E(SCLK)	H/H→L	Enable Signal (Serial Clock)
7	DB0	H/L	Data Bus Line
8	DB1	H/L	
9	DB2	H/L	
10	DB3	H/L	
11	DB4	H/L	
12	DB5	H/L	
13	DB6	H/L	
14	DB7	H/L	
15	RESET	L	Reset Signal,Active LOW
16	VR(NC)	--	SupplyVoltageForLCD(Output)
17	LED+	--	LED Backlight Power Supply(DC5V)
18	LED-	--	

BLOCK DIAGRAM

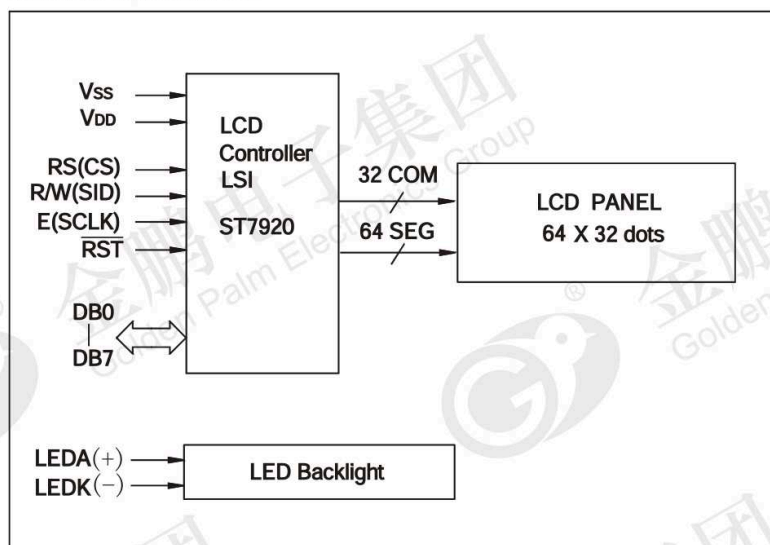

LED BACKLIGHT SPECIFICATIONS (Ta=25 °C)

Item	Symbol	Typ.	Max.	Unit
Forward Voltage	V _f	3.0	3.3	V
Forward Current	I _f	20	25	mA
Emission Wave Length	λ _p	568	--	nm